

Engage your consumer

Promote your business

A complete M2M telemetry and cashless payment solution ideally suited for unattended machines in multiple markets

One device that accepts all cashless payments and transmits data in real time

- ▶ Debit and Credit Cards
- ▶ Mobile, NFC Payments, Prepaid cards and Closed environment solutions
- ▶ Swipe, Contact and Contactless



1 Part of a complete solution

- ▶ Seamlessly integrated with telemetry, cashless clearance, monitoring, management and BI
- ▶ Monitor machines in real-time with continuously updated information on all aspects of operation
- ▶ Inventory, cash monitoring, alerts and reports

2 Communicate with your consumers

- ▶ Voice interaction, in local language
- ▶ Multi-language display capability
- ▶ Enables mobile payments and NFC
- ▶ Customizable color touchscreen

3 Streamline your operation


- ▶ Switch to technician mode to monitor visits
- ▶ Applicable to all automated machines
- ▶ Compatible with FDA and EU disclosure regulations

4 Plug and play

- ▶ Easy to install
- ▶ Remote software updates
- ▶ Durable and highly secured to prevent vandalism



All-in-one card reader and telemetric terminal

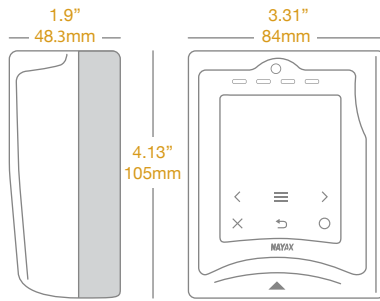

A complete payment solution and remote secure terminal for unattended automated machine operators.

Benefit from easy installation, clearance, monitoring and management.

Supported Payment Schemes

Contact Card: EMV Level 1 + Level 2 - Certified
Contactless: EMV Level 1 - Certified
Contactless: EMV Level 2:
 Visa PayWave EMV + Mag Stripe
 MasterCard PayPass EMV + Mag Stripe
Magnetic Stripe Card: Tracks 1,2,3 - JIS II
Other Cards Supported: NFC, MIFARE, HID-iClass, FeliCa
Support of Payment Applications: Global and Local Environments

Interfaces & Management

Control logistics and usage of machines
Dormant until card approaching
Menu navigation and technical service functionalities
Web management suite for customization
Color Touch LCD Display 2.4 inch IPS 320 x 240 + 4 LEDs + Buzzer + Speaker + Six Soft Touch Buttons
Power Supply: 12 Volt AC/DC - 36 Volt AC/DC
Security: Support DES, 3DES, AES, RSA public key, SHA1 algorithms
On-board SAM: EMV/HID support
RF contactless Interface: Frequency - 13.56 MHz, MIFARE, NFC, HID
Camera 3M Pixels
Mini USB (Host/Device), Ethernet, Bluetooth, WiFi
Microphone
2 X RS232 interface (RS232 or TTL level manageable through software)
6 X Pulse input/output interfaces + 1 X pulse input (Inhibit)
2 X Sensors - door open, temperature sensor
3G Modem: GSM / GPRS / CDMA
MDB (+ DEX / DDCMP) / Pulse / VCCS / ccTalk / JVMA

Physical Dimensions

H	4.13 inches	105 mm
W	3.31 inches	84 mm
D	1.9 inches	48.3 mm
Weight	8.11 ounces	230 grams

Regulatory Compliance

CE + FCC + RoHS
For Indoor and Outdoor use
ESD protected

Operating Conditions

Temperature	-20°C - 55°C	-22°F - 122°F
Humidity	25% - 95% (non-condensing)	

Storage Conditions

Temperature	-30°C - 85°C	-40°F - 140°F
Humidity	25% - 95% (non-condensing)	

Main Features

ARM, Cortex 32-bits (M4 + M7)
High Security Encryption System: AES/DES
External flash 64 MB, SD Card 4 GB, SD RAM 16 MB
Anti-Vandal with Gorilla Glass
Shock and tilt detector
Monitoring and alert of Power down
Decorative LED for Contact Smart Card slot

Standards

ISO 7811 Magnetic Stripe Card
ISO 7816 Contact Smart Card, approved by EMVco
ISO 14443 Contactless Type A and B, approved by EMVco
ISO 15693 NFC
JIS X 6391-4 FeliCa

Let Nayax help your business maximize your profits.
Contact us today to learn more.

Executive Plaza 1, 11350 McCormick Road, Suite 1004, Hunt Valley, Maryland 21031
www.nayax.com | (410) 666-3800